


Beacon Light

50W, 120V, 60Hz LED Flood Light

Luminous Intensity Distribution Diagram

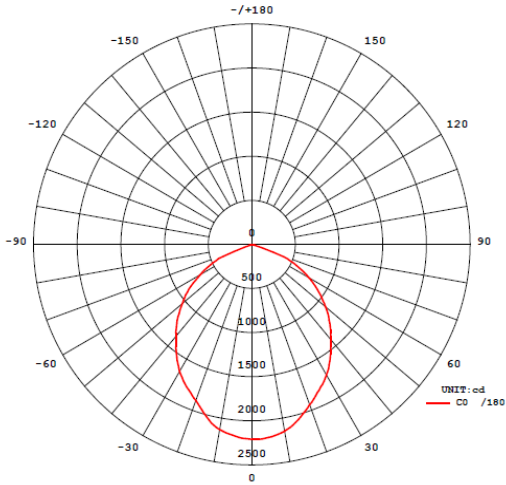

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM


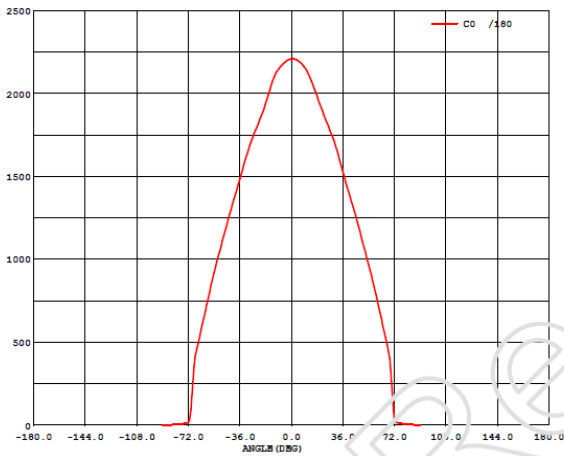


Fig. C0/C180

H(β) Range: -90 to 90°
H(β) Interval: 0.5°
Test Speed: HIGH
Temperature: 25.3°

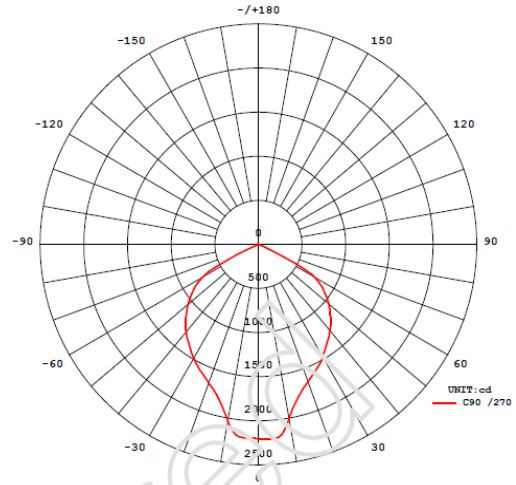

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

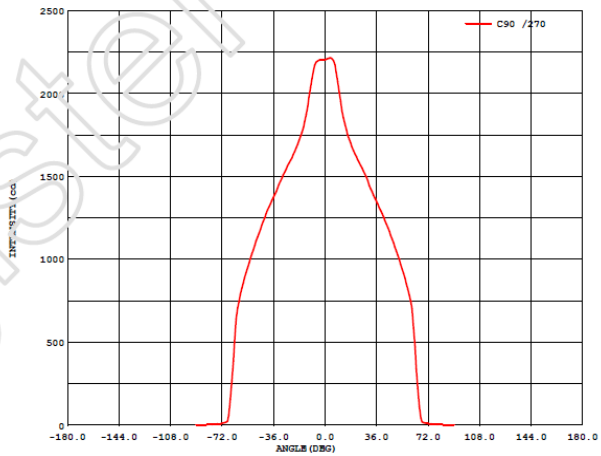


Fig. C90/C270

H(β) Range: -90 to 90°
H(β) Interval: 0.5°
Test Speed: HIGH
Temperature: 25.3°