


High Power GFCIs

ADJUSTABLE TRIP LEVELS

For high powered equipment, these units allow the choice of one of the three trip settings at 6mA, 10mA, and 30mA levels. Trip levels can be changed through a lock and key to meet the most sensitive trip level at which the equipment can be operated without nuisance tripping. All units are automatic reset.

Technical Data	
Response time for ground fault	25mS - typical
Frequency	50/60Hz
Endurance	3,000 operations minimum
Overload Current	six times rated current
Operating temperature range	-20°C to +40°C
Insulation voltage	1500 VRMS - 1 Min.
Power On indication	lighted indicator
Drop out voltage	60% rated voltage - typical
Reset type	auto
Connection type	flying leads
Enclosure	NEMA 4 polymer

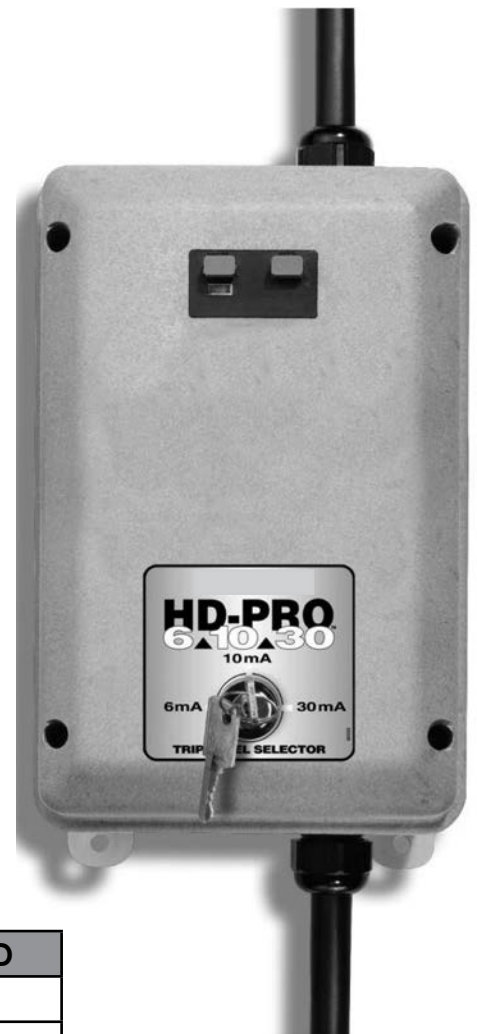

PART NO.	VOLT/AMP	CORD LINE & LOAD
24846	3 phase, 208-240V/30A	2' of 8/5 cord
24542	3 phase, 208-240V/60A	2' of 4/4 cord
24946	3 phase, 600V/60A	2' of 4/4 cord

For more information about our other lines of portable electrical equipment for the toughest workplaces:

www.lindequipment.net | info@lindequipment.net | T: 877.475.LIND